PS 150

15VDC Rack Mountable, Multiple Output Power Supply

FEATURES

- Powers up to six Extron architectural interfaces, twisted pair products, or distribution amplifiers
- Provides six separate 15VDC outputs for a cumulative total of 5.0 amps, using two 6-pin captive screw connectors
- Accepts 100-240VAC, 50/60 Hz
- Rack-mountable, 1U quarter rack width, vented metal enclosure

DESCRIPTION

The **Extron PS 150** is a 15V rack mountable, multiple output power supply. It is designed to power up to six Extron Twisted Pair products, Architectural Series interfaces, or distribution amplifiers. The PS 150 provides six separate 15VDC power outputs using captive screw connectors. It accepts 100-240VAC, 50/60 Hz. The rack-mountable PS 150 is housed in a 1U, quarter rack width, vented metal enclosure.

SPECIFICATIONS

GENERAL

Power input	100 VAC to 240 VAC, 50/60 Hz, internal, autoswitchable
Power output	(6) 15 VDC outputs (maximum current of all outputs 5.0 A)
Temperature/humidity	Storage: -40 to +158 °F (-40 to +70 °C) /10% to 90%, noncondensing Operating: +32 to +113 °F (0 to +45 °C) /10% to 90%, noncondensing
Rack mount	Yes, with optional rack shelf, part #60-190-01
Enclosure type	Metal
Enclosure dimensions	1.75" H x 4.4" W x 8.5" D (1U high, quarter rack wide) 4.4 cm H x 11.2 cm W x 21.6 cm D
Product weight	1.2 lbs (0.5 kg)
Shipping weight	3 lbs (2 kg)
Vibration	ISTA 1A in carton (International Safe Transit Association)
Listings	UL, CUL
Compliances	CE
MTBF	30,000 hours
Warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

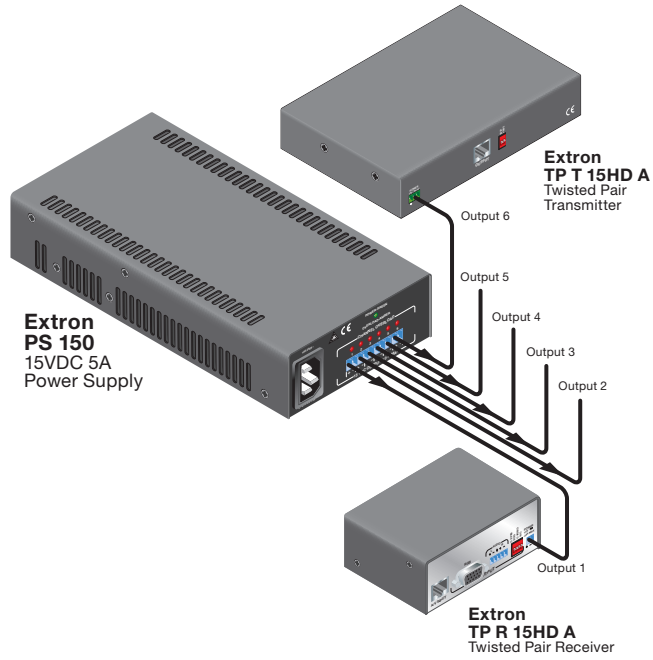

MODEL	VERSION DESCRIPTION	PART #
PS 150	Universal 15VDC, 5.0 Amp power supply	60-432-01

Europe
+31.33.453.4040 / +800.3987.6673
+31.33.453.4050 FAX

Dubai
+971.4.2991800
+971.4.2991880 FAX

Asia
+65.6383.4400 / +800.7339.8766
+65.6383.4664 FAX

China
+86.21.3760.1568 / +400.883.1568
+86.21.3760.1566 FAX

Japan
+81.3.3511.7655
+81.3.3511.7656 FAX

Extron®